



## User Guide (v1.0)

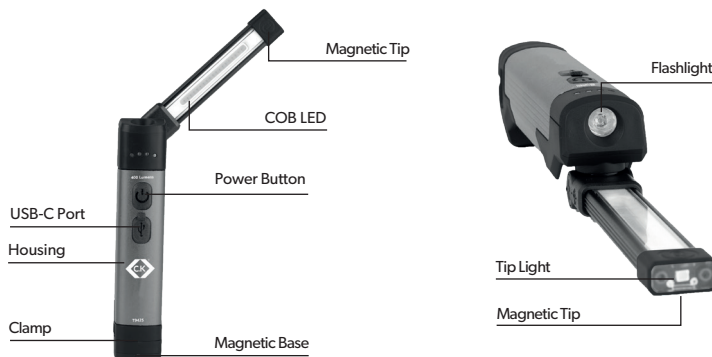


## COB inspection light 400lm

Please read the following instructions carefully and keep for future reference. Correct usage and maintenance are essential to ensure maximum battery life and performance.

**Box Contents:**

- 1 x Inspection light
- 1 x USB-C charging cable
- 1 x Instruction manual

**CHARGING:**

- 1 Switch the light off before charging
- 2 Plug the USB cable into the USB-C input and connect to an appropriate adapter/power source
- 3 The battery indicator will flash the corresponding battery level when charging  
When the battery has finished charging all lights will be solid blue
- 4 Charging time is approximately 4 hours

**MAINTENANCE:**

- 1 A full charge of at least 4 hours prior to initial use is recommended
- 2 Always recharge after use
- 3 It is advisable to charge the battery if not used for 3 months

**CAUTION:**

- 1 Never attempt to disassemble the inspection light
- 2 Never shine the inspection light directly in someone's eyes
- 3 Do not over rotate the inspection light joint, Maximum rotation 180°

**INSTRUCTIONS FOR USE:**

- |  |  |
|--|--|
| <ol style="list-style-type: none"> <li>1 Press the power button / mode switch to turn the inspection light ON, the battery indicator will light up the corresponding battery level.</li> <li>2 Further presses of the power button/mode switch will change between modes:<br/>a. Inspection light / b. Red light / c. Tip light. Double tap for flashlight.</li> </ol> | <ol style="list-style-type: none"> <li>3 Hold power button on any mode to adjust brightness, once max/min brightness is achieved the light will blink.</li> <li>4 Located on the base of the product is the magnet, hanging hook, and the clamp. Pull the hanging hook down to operate the clamp.</li> </ol> |
|--|--|

## COB Inspection Light 400Im

RUNNING TIME (Approx)	Inspection Light: 3 hours Red Light: 3 hours Flashlight: 5 hours Tip Light: 17 hours
CHARGE TIME	4 Hours at 1A
BATTERY TYPE	3.7V 2600mAh lithium battery
CHARGE INPUT	5V 1A
OUTPUT	5V 1A
4 OPERATION MODES	Inspection Light > Red light > Tip light > Front flashlight All modes are dimmable
LUMENS	Up to 400 lumens
IP LEVEL	IPX0
IK LEVEL	IK07